





FOR OFF ROAD USE ONLY


18-19 DUCATI PANIGALE V4 ALL BLOCKOFF PLATES

1. Remove the hoses from the factory reed covers
2. Remove BOTH the reed covers from the cylinder head
3. Cap "sis" valve using supplied cap and zip tie in place .

REMOVE

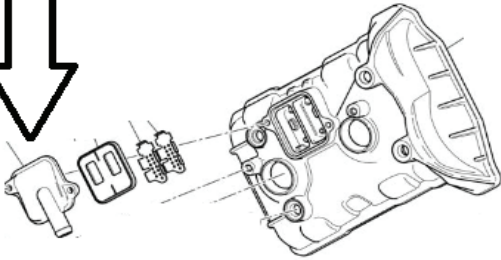

REMOVE

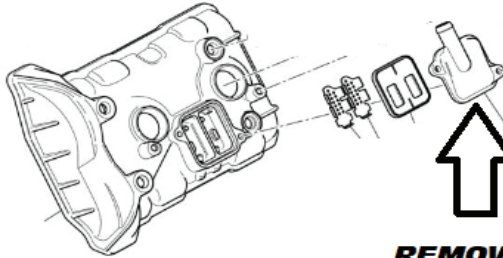

TST00614




FOR OFF ROAD USE ONLY


18-19 DUCATI PANIGALE V4 ALL BLOCKOFF PLATES

1. Remove the hoses from the factory reed covers
2. Remove BOTH the reed covers from the cylinder head
3. Cap "sis" valve using supplied cap and zip tie in place .

REMOVE

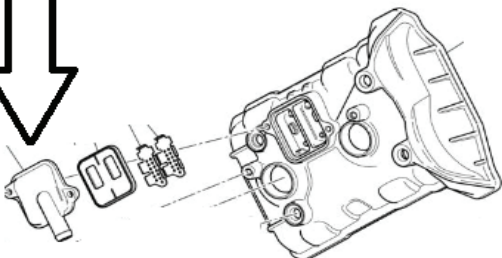

REMOVE

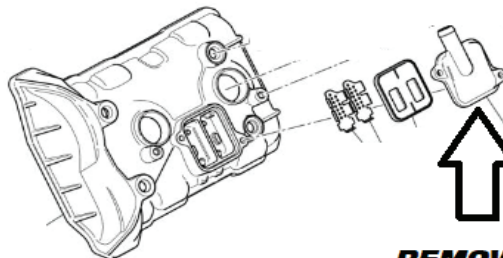

TST00614