

FOR OFF ROAD/RACE USE ONLY!



SIDE STAND SWITCH DELETE


Part # DSSD-XX

Installation Instructions

1. Follow your side stand switch wire to the plug (normally under seat or tank) fig 1
- 2 . Plug male connector into wire harness. (secure to bike with zip tie)
3. Remove kick stand and wire .
4. Check for proper operation.

fig. 1

locate side stand connector →

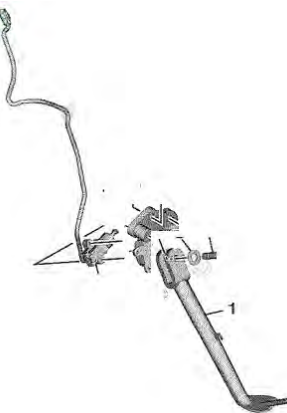

THE USE OF BLUE LOCTITE IS REQUIRED ON ALL MOUNTING HARDWARE!

FOR OFF ROAD/RACE USE ONLY!



SIDE STAND SWITCH DELETE


Part # DSSD-XX

Installation Instructions

1. Follow your side stand switch wire to the plug (normally under seat or tank) fig 1
- 2 . Plug male connector into wire harness. (secure to bike with zip tie)
3. Remove kick stand and wire .
4. Check for proper operation.

fig. 1

locate side stand connector →

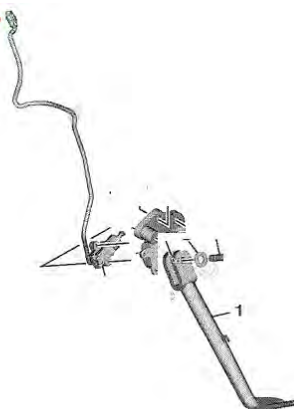

THE USE OF BLUE LOCTITE IS REQUIRED ON ALL MOUNTING HARDWARE!