




# BLOCK OFF PLATES

1. Make sure ignition key is turned to the off position and engine is cool.
2. Place motorcycle on lift, rear stand, or side stand.
3. Locate the final destination of the new block off plates.
4. Carefully remove any fairings if needed.
5. Carefully remove fuel tank and air box.
6. Carefully remove any parts obstructing the OEM plates and then remove them.
7. Using blue Loctite, install the new block off plates using the OEM hardware, and the OEM sealing O rings if present.
8. Locate OEM air hose leading to the airbox from the OEM plates removed.
9. Using supplied cap, remove hose and plug airbox.
10. Carefully replace airbox, fuel tank, fairings, and any other pieces removed during installation.


- DSBLOCK
- DSBLOCK-1
- DSBLOCK-2
- DSBLOCK-3
- DSBLOCK-4
- DSBLOCK-5
- DSBLOCK-6
- DSBLOCK-7

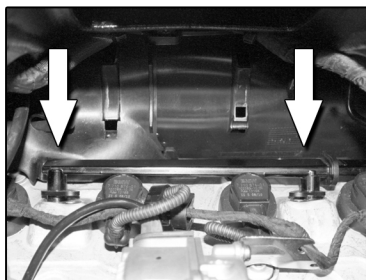


# BLOCK OFF PLATES

1. Make sure ignition key is turned to the off position and engine is cool.
2. Place motorcycle on lift, rear stand, or side stand.
3. Locate the final destination of the new block off plates.
4. Carefully remove any fairings if needed.
5. Carefully remove fuel tank and air box.
6. Carefully remove any parts obstructing the OEM plates and then remove them.
7. Using blue Loctite, install the new block off plates using the OEM hardware, and the OEM sealing O rings if present.
8. Locate OEM air hose leading to the airbox from the OEM plates removed.
9. Using supplied cap, remove hose and plug airbox.
10. Carefully replace airbox, fuel tank, fairings, and any other pieces removed during installation.

- DSBLOCK
- DSBLOCK-1
- DSBLOCK-2
- DSBLOCK-3
- DSBLOCK-4
- DSBLOCK-5
- DSBLOCK-6
- DSBLOCK-7

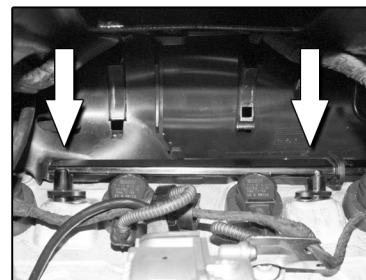

**WWW.DRIVENRACING.COM**  
**1-866-5-DRIVEN**


**WWW.DRIVENRACING.COM**  
**1-866-5-DRIVEN**



# BLOCK OFF PLATES

1. Make sure ignition key is turned to the off position and engine is cool.
2. Place motorcycle on lift, rear stand, or side stand.
3. Locate the final destination of the new block off plates.
4. Carefully remove any fairings if needed.
5. Carefully remove fuel tank and air box.
6. Carefully remove any parts obstructing the OEM plates and then remove them.
7. Using blue Loctite, install the new block off plates using the OEM hardware, and the OEM sealing O rings if present.
8. Locate OEM air hose leading to the airbox from the OEM plates removed.
9. Using supplied cap, remove hose and plug airbox.
10. Carefully replace airbox, fuel tank, fairings, and any other pieces removed during installation.


- DSBLOCK
- DSBLOCK-1
- DSBLOCK-2
- DSBLOCK-3
- DSBLOCK-4
- DSBLOCK-5
- DSBLOCK-6
- DSBLOCK-7

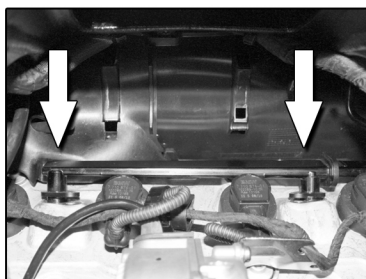


# BLOCK OFF PLATES

1. Make sure ignition key is turned to the off position and engine is cool.
2. Place motorcycle on lift, rear stand, or side stand.
3. Locate the final destination of the new block off plates.
4. Carefully remove any fairings if needed.
5. Carefully remove fuel tank and air box.
6. Carefully remove any parts obstructing the OEM plates and then remove them.
7. Using blue Loctite, install the new block off plates using the OEM hardware, and the OEM sealing O rings if present.
8. Locate OEM air hose leading to the airbox from the OEM plates removed.
9. Using supplied cap, remove hose and plug airbox.
10. Carefully replace airbox, fuel tank, fairings, and any other pieces removed during installation.

- DSBLOCK
- DSBLOCK-1
- DSBLOCK-2
- DSBLOCK-3
- DSBLOCK-4
- DSBLOCK-5
- DSBLOCK-6
- DSBLOCK-7

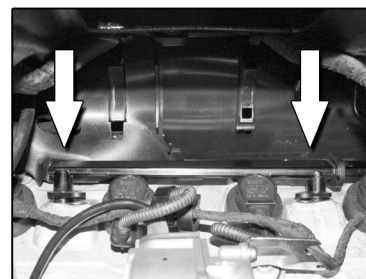

**WWW.DRIVENRACING.COM**  
**1-866-5-DRIVEN**

**WWW.DRIVENRACING.COM**  
**1-866-5-DRIVEN**